

# Inteligentna Oprawa LED 1-10V

## HD HL



LUMILEDS

MW  
MEAN WELL



Model	P	lm	K	Beam	V	CRI	PF	Temp	LM/W	Dimensions	kg
HD HL 90 W	90 W	12600 lm	5000 K	60x90° 120°	100-240 V	> 80	> 0.95	-20 ÷ 60°C	140 lm/W	L600xW80x H80 mm	6 kg
HD HL 120 W	120 W	16800 lm	5000 K	60x90° 120°	100-240 V	> 80	> 0.95	-20 ÷ 60°C	140 lm/W	L900xW80x H80 mm	7 kg
HD HL 150 W	150 W	21000 lm	5000 K	60x90° 120°	100-240 V	> 80	> 0.95	-20 ÷ 60°C	140 lm/W	L1200xW80x H80 mm	8,6 kg

LEDOLUX

### MATERIAŁ

**Obudowa:** aluminium  
**Dyfuzor:** soczewki z PC

### ZASILANIE

**Zasilacz:** MEAN WELL ze sterowaniem 1-10V wewnątrz obudowy

### SYSTEMY DODATKOWE

**Sterowanie 1-10V**  
**DALI:** elektroniczny układ sterowania



### MONTAŻ

**Zwieszany:** regulowane zwieszenie linkowe


### ZASTOSOWANIE

**Hale:** produkcyjne, magazynowe  
**Centra:** handlowe, logistyczne

## ➤ RYS. TECHNICZNY

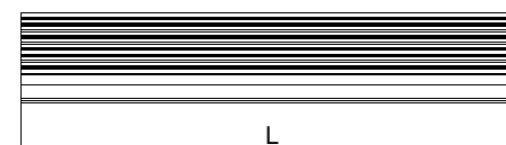

## ➤ FOTOMETRIA

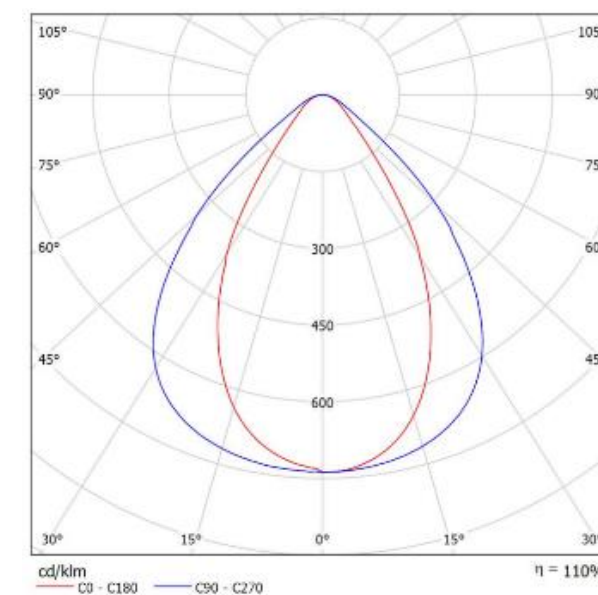

60x90°