



TECHNICAL INFORMATION

Watts:	20
Lumens:	1600
Input Power:	AC:220-240V, 50Hz
Long Life:	30,000 Hours
Unit Color:	Black
Body Type:	Die Cast Aluminium
PF:	>0.7
LED Chip Type:	SMD-Samsung Chip
CRI:	>80
Operation Temperature:	-20°C to +45°C
Dimmable:	No
Beam Angle:	100°
Color Temperature:	3000K
Dimension:	153x55.46x177.75mm
Sensor Type:	PIR
Detection Distance:	2-8m(


PIR SENSOR PRO

V-TAC's LED Lighting range includes lighting that fulfills the needs of various end-users and industries, offering efficient and innovative products that provide modern solutions at an affordable price. We are proud to also provide extended multi-year warranty on our products, as well as detailed support.

One brand, endless solutions..

SKU: 451 - 931 938

[View more details](#)

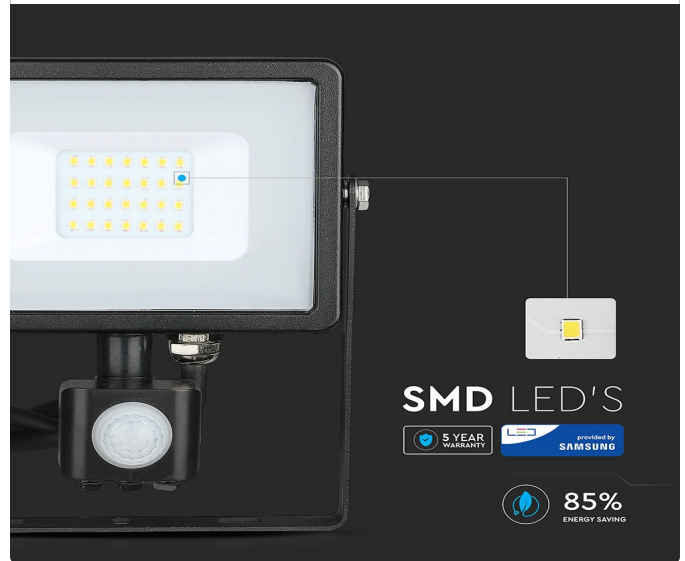

IP65
RATING



5 YEAR
WARRANTY



IK 05



CRI > 80



SAVE UP TO
85%
ENERGY

FEATURES

- PIR Sensor Floodlight built with adjustable sensor head
- Designed with Manual Override functionality
- IP65 protection - Built with 1 Meter wire.
- Designed with high efficiency LED Samsung Chips
- Built in driver - no external power supply required
- Built Strong and durable with Die Cast Aluminium - Corrosion resistant design
- Suitable for driveways, gardens, patio, building, security lighting etc.

CE/EMC

CE/LVD



PACKAGING

Gross Weight (Kgs): **0.578**
Unit CBM: **0.00288**
Dimension: **153x55.46x177.75mm**

MASTER BOX PACKAGING

Box Qty: **20**
Qty Per Pallet: **480**
Length (Box) mm: **80**
Width (Box) mm: **180**
Height (Box) mm: **200**

LISTING DETAILS

Commodity Code: **9405403990**
Ean Code: **3800157631075**